

BareTone[®]

PRO AUDIO SYSTEM



2014-2015



Maxtronix Co.,Ltd is American-Owned company, was founded in 1996.

Maxtronix is the products making center which combined R&D, making and sales. We are specialized in products of Speaker (Active Speaker, Passive Speaker, Subwoofer), Power Mixer and Amplifier, AC/DC adaptor, Audio/Video cable. We own well-experienced and high-technology electronics and electrical engineers. And with high technical power, advance produce process, complete test in instrument and high-end development lab. All the quality control process strictly according to ISO9001:2000 standard. Our concept is "respect for individuality, pursuit excellence". Main market is spread in US, Southeast Asia, EU. Central and south America, our principle is supply the excellent product to the world.

Facing rapid changes in the market, we are keeping self-improvement and development by improving the management, reengineering, and forming company culture. We make ourselves as market- direction, customer-focused company, keeping provide high-quality and well-preformed consumer products.



PROFESSIONAL AUDIO

CONTENTS

PA Series	4-17
Professional sound system	18-19
Portable PA System	20
Power Mixer Series	21
Paint Wooden Series	22-23
Car Subwoofer Series	24
Subwoofer Series	25
Speaker Accessories	26-27

PA SERIES-ACTIVE/PASSIVE



(A)



(B)



(C)

Model: BT-3A1525S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3A1530S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-A1530S

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 inputFunction: with speakon

Model: BT-A1540W-PASSIVE

15" 2 Way Passive Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 400W

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3A1525S/BT-3A1530S BT-A1530S/BT-A1540W	510×455×745	1	165	370

PA SERIES-ACTIVE/PASSIVE



(A)



(B)



(C)

Model: BT-3C1525S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3C1530S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-C1530S

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with speakon

Model: BT-C1540W-PASSIVE

15" 2 Way Passive Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 400W

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3C1525S/BT-3C1530S BT-C1530S/BT-C1540W	510×455×745	1	165	370

PA SERIES-ACTIVE/PASSIVE



(A)



(B)



(C)

Model: BT-3L1525S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3L1530S

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-L1530S

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with speakon

Model: BT-L1540W-PASSIVE

15" 2 Way Passive Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 400W

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3L1525S/BT-3L1530S BT-L1530S/BT-L1540W	510×455×745	1	165	370

PA SERIES-ACTIVE/PASSIVE



(A)



(B)



(C)

Model: BT-MAX1525A

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-MAX1530A

15" 2 Way Active Speaker Box With Speakon
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-MAX1535A

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 350W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 inputFunction: with speakon

Model: BT-MAX1540AW-PASSIVE

15" 2 Way Passive Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 400W

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
MAX1525A/MAX1530A MAX1535A/MAX1540AW	465×405×745	1	204	495

PA SERIES-ACTIVE



- Multi-function design, can be used for small meetings, stage monitor, outdoor activities, personal performance and so on.
- Optimize design of precision crossover, selected high-quality device to ensure pristine sound quality and accuracy.
- Switching power supply, small size, light weight, high power, high efficiency.
- World wide AC100-240V wide voltage input.
- Efficient cooling structure, the power tube fixed above the radiator, amplifier withstand high temperature, good stability. Small space but with greater power output, more perfect sound quality.
- Amplifier with own-designed IC, the perfect combination of acoustic and electronic technology.
- Speakon output overload protection.
- Treble titanium membrane driven, light weight and high sensitivity, the sound signal authentic response in smooth frequency.
- Karpton voice coil, the higher power carrying capacity and minimal power compression.
- Stander mounting holes at the bottom of the speaker box, could be quick Install.

PA SERIES-ACTIVE



(A)



(B)



(C)

Model: BT-3M1215S

12" 2 Way Active Speaker Box
 Woofer: 12"
 Magnet: 30Oz
 Voice Coil: 38mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 92dB
 Impedance: 8ohm
 Power: 150W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth

Model: BT-3M1225S

12" 2 Way Active Speaker Box
 Woofer: 12"
 Magnet: 40Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 94dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth

Model: BT-3M1525S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth

Model: BT-3M1530S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3M1215S/BT-3M1225S	423×345×635	1	320	725
BT-3M1525S/BT-3M1530S	488×403×745	1	198	475

PA SERIES-ACTIVE



(A)



(B)



(C)

Model: BT-3J1215S

12" 2 Way Active Speaker Box
 Woofer: 12"
 Magnet: 30Oz
 Voice Coil: 38mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 92dB
 Impedance: 8ohm
 Power: 150W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 with wheel and handle
 Select Function:Bluetooth

Model: BT-3J1225S

12" 2 Way Active Speaker Box
 Woofer: 12"
 Magnet: 40Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 94dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 with wheel and handle
 Select Function:Bluetooth

Model: BT-3J1525S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 with wheel and handle
 Select Function:Bluetooth

Model: BT-3J1530S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 50Oz
 Voice Coil: 60mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC100/220V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 with wheel and handle
 Select Function:Bluetooth

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3J1215S/BT-3J1225S	423×415×635	1	234	560
BT-3J1525S/BT-3J1530S	495×478×770	1	132	324

PA SERIES-ACTIVE



(A)



(B)



(C)

Model: BT-3Y1215S

12" 2 Way Active Speaker Box With Speakon
 Woofer: 12"
 Magnet: 40Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 8ohm
 Power: 150W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3Y1225S

12" 2 Way Active Speaker Box With Speakon
 Woofer: 12"
 Magnet: 50Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3Y1525S

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3Y1530S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3Y1215S/BT-3Y1225S	425×385×630	1	255	600
BT-3Y1525S/BT-3Y1530S	505×450×740	1	165	375

PA SERIES-ACTIVE



(A)



(B)



(C)

Model: BT-3R1215S

12" 2 Way Active Speaker Box With Speakon
 Woofer: 12"
 Magnet: 40Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 8ohm
 Power: 150W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3R1225S

12" 2 Way Active Speaker Box With Speakon
 Woofer: 12"
 Magnet: 50Oz
 Voice Coil: 50mm KSV
 Tweeter: 34mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 96dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3R1525S

15" 2 Way Active Speaker Box With Speakon
 Professional Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 97dB
 Impedance: 8ohm
 Power: 250W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3 screen and FM, USB, SD Card input

Model: BT-3R1530S

15" 2 Way Active Speaker Box
 Woofer: 15"
 Magnet: 60Oz
 Voice Coil: 75mm KSV
 Tweeter: 44mm Ti.Diap.Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 98dB
 Impedance: 8ohm
 Power: 300W
 Input Voltage: AC110V, 50/60Hz or AC220V, 50/60Hz
 Linear power supply
 Function: with MP3 screen and FM, USB, SD Card input

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3R1215S/BT-3R1225S	425×385×630	1	255	600
BT-3R1525S/BT-3R1530S	505×450×740	1	165	375

PA SERIES-ACTIVE



BT-3M1212BWR

12" 2 WAY active speaker
 Woofer: 12" woofer, 40Oz, 38mm KSV voice coil
 Tweeter: 25mm Driver
 Frequency response: 50Hz-15KHz
 Sensitivity: 91dB±2dB(1W/1m)
 Input voltage: AC100-240V, 50/60Hz or DC12V or
 Rechargeable battery 12V,7AH
 RMS Power:120W
 With normal MP3, FM, USB, SD card input,
 2VHF wireless microphone, Sound recording function

BT-3M1515BWR

15" 2 WAY active speaker
 Woofer: 15" woofer, 50Oz, 38mm KSV voice coil
 Tweeter: 25mm Driver
 Frequency response: 50Hz-15KHz
 Sensitivity: 92dB±2dB(1W/1m)
 Input voltage:AC100-240V, 50/60Hz or DC12V or
 Rechargeable battery 12V,10AH
 RMS Power:130W
 With normal MP3, FM, USB, SD card input,
 2VHF wireless microphone, Sound recording function

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3M1212BWR	425×380×640	1	234	645
BT-3M1515BWR	488×403×745	1	198	400

BT-3H1212BWR

12" 2 WAY active speaker
 Woofer: 12" woofer, 40Oz, 38mm KSV voice coil
 Tweeter: 25mm Driver
 Frequency response: 50Hz-15KHz
 Sensitivity: 91dB±2dB(1W/1m)
 Input voltage: AC100-240V, 50/60Hz or DC12V or
 Rechargeable battery 12V,7AH
 RMS Power:100W
 With normal MP3, FM, USB, SD card input,
 2VHF wireless microphone, Sound recording function

BT-3H1515BWR

15" 2 WAY active speaker
 Woofer: 15" woofer, 50Oz, 38mm KSV voice coil
 Tweeter: 25mm Driver
 Frequency response: 50Hz-15KHz
 Sensitivity: 92dB±2dB(1W/1m)
 Input voltage:AC100-240V, 50/60Hz or DC12V or
 Rechargeable battery 12V,10AH
 RMS Power:120W
 With normal MP3, FM, USB, SD card input,
 2VHF wireless microphone, Sound recording function



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3H1212BWR	425×385×660	1	210	600
BT-3H1515BWR	515×445×770	1	165	330

PA SERIES-ACTIVE



BT-3M1010BWR

10" 2 WAY active speaker
 Woofer: 10" woofer, 30Oz, 38mm KSV voice coil
 Tweeter: 25mm Driver
 Frequency response: 50Hz-15KHz
 Sensitivity: 91dB±2dB(1W/1m)
 Input voltage: AC100-240V, 50/60Hz or DC12V or
 Rechargeable battery 12V, 5AH
 RMS Power:100W
 With normal MP3, FM, USB, SD card input

Model: BT-3M1015S

10" 2 Way Active Speaker Box
 Woofer: 10"
 Magnet: 30Oz
 Voice Coil: 38mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 90dB
 Impedance: 8ohm
 Power: 150W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth



Model: BT-3M0810S

8" 2 Way Active Speaker Box
 Woofer: 8"
 Magnet: 20Oz
 Voice Coil: 38mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 89dB
 Impedance: 8ohm
 Power: 100W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Select Function:Bluetooth



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3M1010BWR/BT-3M1015S	363×295×545	1	456	1848
BT-3M0810S	300×246×450	1	895	2100

PA SERIES-ACTIVE



Model: BT-B0810

8" 2 Way Active Speaker Box

Woofer: 8"

Magnet: 20Oz

Voice Coil: 38mm KSV

Tweeter: 25mm Driver

Frequency Response: 40Hz-20KHz

Sensitivity: 92dB

Impedance: 8ohm

Power: 120W

Input Voltage: AC100-240V, 50/60Hz

Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-B0810	340×275×465	1	610	1430

Model: BT-3C0810

8" 2 Way Active Speaker Box

Woofer: 8"

Magnet: 20Oz

Voice Coil: 38mm KSV

Tweeter: 25mm Driver

Frequency Response: 40Hz-20KHz

Sensitivity: 92dB

Impedance: 8ohm

Power: 120W

Input Voltage: AC100-240V, 50/60Hz



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-3C0810	340×275×465	1	610	1430

PA SERIES-ACTIVE




Model: MAX0605A

6.5" 2 Way Active Speaker Box
 Woofer: 6.5"
 Magnet: 18Oz
 Voice Coil: 25mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 2ohm
 Power: 80W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input
 Apply for: Church, classroom, small party, conference and so on

Model: MAX0605B

6.5" 2 Way Active Speaker Box
 Woofer: 6.5"
 Magnet: 18Oz
 Voice Coil: 25mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 2ohm
 Power: 80W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input,
 wireless microphone, sound recording function

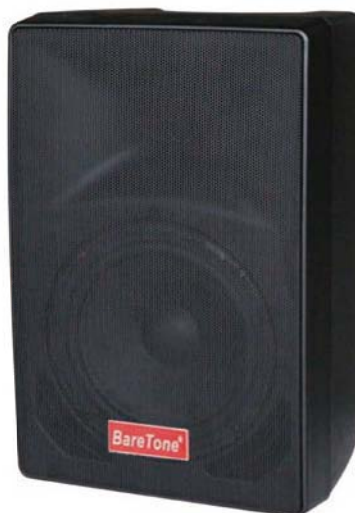

Model: MAX0605C

6.5" 2 Way Active Speaker Box
 Woofer: 6.5"
 Magnet: 18Oz
 Voice Coil: 25mm KSV
 Tweeter: 25mm Driver
 Frequency Response: 40Hz-20KHz
 Sensitivity: 95dB
 Impedance: 2ohm
 Power: 80W
 Input Voltage: AC100-240V, 50/60Hz
 Function: with MP3, FM, USB, SD Card input,
 wireless microphone



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
MAX0605A/MAX0605B/ MAX0605C	305×245×435	1	810	2052



Model: MAX0405A

Woofer: 2x4"

Voice Coil: 25mm KSV

Frequency Response: 60Hz-15KHz

Sensitivity: 88dB

Impedance: 4ohm

Power: 100W

Input Voltage: AC100-240V, 50/60Hz

Function: with MP3, FM, USB, SD Card input

■ Unique design, suitable for home music play, baby story play, small conference, class teaching, church, party, market sales, promotion sales and so on.

■ Light weight, still with MP3, SD card input. also can chose bluetooth, share your mobile fantastic music.

PROFESSIONAL SOUND SYSTEM

Model:BT-AM400P

Speaker

- LF Driver:10" Woofer
- HF Driver:25mm Driver
- Impedance:8 Ohm
- Power:200W

Mixer

- 4 Mic./Line Inputs
- 1 Pair of TRS or RCA Stereo

Input

- 1×3.5mm Stereo Input
- MP3 Player with FM Radio

Overall

- Power Input:AC100-240V,50/60Hz
- Power Output:200W+200W

Tripod height:62.5-110cm



- Combine individual tone controls, multiple digital effects and stereo individual output and MP3 player input in one integrate audio system.
- Highly designed composite enclosures for durability, lightweight, and acoustic performance.
- 400 watt High-Performance Powered Speaker System.
- 8 chanel powered mixer with intuitive interface.



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-AM400P	635×360×540	1	200	504
BT-AM400P SET	635×360×645	1	170	440

PROFESSIONAL SOUND SYSTEM



- Combine individual tone controls, multiple digital effects and stereo individual output and MP3 player input in one integrate audio system.
- Highly designed composite enclosures for durability, lightweight, and acoustic performance.
- 5 channel professional adjustment of TREBLE, MIDDLE and BASS output, make the sound more perfect.
- With 1-channel stereo TREBLE, MIDDLE and BASS adjustment to meet powerful demand
- 400/600Watt High-Performance Powered Speaker System.
- 9 chanel powered mixer with intuitive interface.
- SD,USB,FM signal input.

Model:BT-AM500P

Overall

-Power Input:AC100-240V,50/60Hz

-Power Output:200W+200W

Model:BT-AM600P

Overall

-Power Input:AC220V,50/60Hz

-Power Output:300W+300W



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-AM500P/BT-AM600P	305×140×515	1	1300	2880

PORTABLE PA SYSTEM

Model:BT-AM800P



TWO MIRELESS MICROPHONES



- Combine individual tone controls, multiple digital effects and stereo individual output and MP3 player input in one integrate audio system.
- Highly designed composite enclosures for durability, lightweight, and acoustic performance.
- 150/300 watt High-Performance Powered Speaker System.
- 9 channel powered mixer with intuitive interface.
- 2 VHF wireless microphones Frequency range:170-260Hz.
- With rechargeable battery 12V,10AH (for 75W+75W) .

Speaker

- LF Driver:10" Woofer
- HF Driver:25mm Driver
- Impedance:8 Ohm/20Ohm

Mixer

- 4 Mic./Line Inputs
- 1 Pair of TRS or RCA Stereo

Input

- 1×3.5mm Stereo Input
- Mp3 Player with FM Radio

Overall

- Power Input:AC100-240V,50/60Hz
- Power Output:75W+75W
150W+150W



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-AM800P	835×370×665	1	135	336

POWER MIXER SERIES



Model: BT-AM8600U

Channel : 4 mono input channel +2 stereo
 Frequency Response: +0/-1dB, 20Hz-20kHz
 T.H.D. & Noise(All measurements at +10dBu output 30dB gain):
 XLR input to Direct output <0.08% @1kHz
 XLR input to Mix output <0.05% @1kHz

Mic Input E.I.N.
 22Hz-22kHz bandwidth, unweighted <-100dBu(150 Ohm source)

Bus Noise
 Mix output, input faders @ - μ , Mix fader 0dB <-80dBu
 Grp output, input faders @ - μ , Grp fader 0dB /
 Aux output, input sends @ - μ , Aux master 0dB <-85dBu

Crosstalk @ 1kHz
 Input channel Muting >90dB
 Input fader cutoff >90dB
 Input pan pot isolation >80dB
 Mix routing isolation >90dB
 Group routing isolation >90dB
 Adjacent channel isolation >95dB
 Group-Mix crosstalk <-80dB
 Aux send off <-90dB
 EQ (Mono Input)
 Hi 10kHz, +/-15dB
 Mid 250kHz-6kHz, +/-15dB
 Low 60Hz, +/-15dB
 Power Consumption
 Universal Mains Input AC110V or AC220V , 50/60Hz.
 Power 8 Ω 250W $\times$ 2

Model:BT-AM8612U

Channel : 8 mono input channel +2 stereo
 Frequency Response: +0/-1dB, 20Hz-20kHz
 T.H.D. & Noise(All measurements at +10dBu output 30dB gain):

XLR input to Direct output <0.08% @1kHz
 XLR input to Mix output <0.05% @1kHz

Mic Input E.I.N.
 22Hz-22kHz bandwidth, unweighted
 <-100dBu(150 Ohm source)

Bus Noise
 Mix output, input faders @ - μ , Mix fader 0dB <-80dBu
 Grp output, input faders @ - μ , Grp fader 0dB /
 Aux output, input sends @ - μ , Aux master 0dB <-85dBu

Crosstalk @ 1kHz
 Input channel Muting >90dB
 Input fader cutoff >90dB
 Input pan pot isolation >80dB
 Mix routing isolation >90dB
 Group routing isolation >90dB
 Adjacent channel isolation >95dB
 Group-Mix crosstalk <-80dB
 Aux send off <-90dB
 EQ (Mono Input)
 Hi 10kHz, +/-15dB
 Mid 250kHz-6kHz, +/-15dB
 Low 60Hz, +/-15dB
 Power Consumption
 Universal Mains Input AC110V or AC220V , 50/60Hz.
 Power 8 Ω 300W $\times$ 2



Item	Carton Dimension (LxWxH)(mm)	QTY/Carton (Pcs)	20GP Stuffing (Pcs)	40HQ Stuffing (Pcs)
BT-AM8600U	495×170×515	1	610	1490
BT-AM8612U	625×170×515	1	500	1215

PAINT WOODEN SERIES

Model:BT-PW215A



System: 2-way 2*15"
 Frequency Response: 38Hz-18KHz
 SPL Maximum: 106±3db
 Voice coil: 75mm KSV
 Magnet: 2*60Oz (AL)
 Impedance: 4 ohm
 Power: 600W (RMS)/1200W(PEAK)
 Input voltage: AC110V/AC220V, 50/60Hz

Model:BT-PW215B

System: 2-way 2*15"
 Frequency Response: 38Hz-18KHz
 SPL Maximum: 106±3db
 Voice coil: 75mm KSV
 Magnet: 2*100Oz (AL)
 Impedance: 4 ohm
 Power: 750W(RMS)/1500W(PEAK)
 Input voltage: AC110V/AC220V, 50/60Hz

Key Features and Benefits:

- High output SPL and sensitivity
- Two 15"high power woofer with 75mm voice coil
- Built-in class B power amplifier module
- Master volume control
- XLR input and output connectors
- Input and output connectors
- Computer aided design to optimise frequency and phase response
- Suitable for use as a main system with or without sub speaker augmentation
- Portable system (stand), or permanent installation



Model:BT-PW15A

15" 2 WAY active speaker
 Woofer: 15" woofer, 60Oz,
 75mm KSV voice coil, 8Ohm
 Tweeter: 44mm Ti .Diap .Driver
 Frequency response: 45Hz-15KHz
 Sensitivity: 97dB±2dB(1W/1m)
 Blue led indicator
 Input voltage: AC110, 50/60Hz
 AC220V, 50/60Hz
 Power: 300W

Model:BT-PW15B

15" 2 WAY active speaker
 Woofer: 15" woofer, 100Oz(AL),
 75mm KSV voice coil, 8Ohm
 Tweeter: 44mm Ti .Diap .Driver
 Frequency response: 45Hz-15KHz
 Sensitivity: 97dB±2dB(1W/1m)
 Blue led indicator
 Input voltage: AC110, 50/60Hz
 AC220V, 50/60Hz
 Power: 400W

PAINT WOODEN SERIES



Model: BT-SP0815W

2-way 08" full range passive speaker
Frequency Response: 60Hz-18KHz
Sensitivity: 90dB
Impedance: 8ohm
Rated Power: 150W
Max. Power: 300W
LF: 08" middle and bass / 38mm voice coil / 150W
HF: Titanium membrane / 34mm voice coil / 40W
Max. SPL: 117dB

Model: BT-SP1020W

2-way 10" full range passive speaker
Frequency Response: 55Hz-18KHz
Sensitivity: 91dB
Impedance: 8ohm
Rated Power: 200W
Max. Power: 400W
LF: 10" middle and bass / 50mm voice coil / 200W
HF: Titanium membrane / 34mm voice coil / 40W
Max. SPL: 119dB

Model: BT-SP1225W

2-way 12" full range passive speaker
Frequency Response: 50Hz-18KHz
Sensitivity: 94dB
Impedance: 8ohm
Rated Power: 250W
Max. Power: 500W
LF: 12" middle and bass / 50mm voice coil / 250W
HF: Titanium membrane / 34mm voice coil / 40W
Max. SPL: 121dB

Model: BT-SP1530W

2-way 15" full range passive speaker
Woofer: 15"
Frequency Response: 45Hz-15KHz
Sensitivity: 97dB
Impedance: 8ohm
Rated Power: 300W
Max. Power: 600W
Woofer: 15" woofer, 60Oz, 75mm KSV voice coil
Tweeter: 44mm Ti. Diap. Driver
Max. SPL: 125dB

Model: BT-SP1540W

2-way 15" full range passive speaker
Woofer: 15"
Frequency Response: 45Hz-15KHz
Sensitivity: 98dB
Impedance: 8ohm
Rated Power: 400W
Max. Power: 800W
Woofer: 15" woofer, 100Oz (AL), 75mm KSV voice coil
Tweeter: 44mm Ti. Diap. Driver
Max. SPL: 127dB

CAR SUBWOOFER SERIES



Model: BT-ST0808

Type: 8" Subwoofer
Material: Paper cone foam edge
Magnet: 20Oz
Voice Coil: 1.5" BASV
Power: 150W
Frequency Response(Bass): 30-300Hz
Frequency Response(Full): 30-20KHz
SPL: 95dB
Impedance: 4ohm
Variable Bass Boost: 0-12dB@50Hz
Input: One Pair RCA
Input Voltage: DC12V

Model: BT-ST1010

Type: 10" Subwoofer
Material: Paper cone foam edge
Magnet: 20Oz
Voice Coil: 1.5" BASV
Power: 200W
Frequency Response(Bass): 30-300Hz
Frequency Response(Full): 30-20KHz
SPL: 95dB
Impedance: 4ohm
Variable Bass Boost: 0-12dB@50Hz
Input: One Pair RCA
Input Voltage: DC12V

Model: BT-ST1215

Type: 12" Subwoofer
Material: Paper cone foam edge
Magnet: 40Oz
Voice Coil: 2" BASV
Power: 300W
Frequency Response(Bass): 30-300Hz
Frequency Response(Full): 30-20KHz
SPL: 95dB
Impedance: 4ohm
Variable Bass Boost: 0-12dB@50Hz
Input: One Pair RCA
Input Voltage: DC12V

Model: BT-ST1220

Type: 12" Subwoofer
Material: Paper cone foam edge
Magnet: 40Oz
Voice Coil: 2" BASV
Power: 400W
Frequency Response(Bass): 30-300Hz
Frequency Response(Full): 30-20KHz
SPL: 95dB
Impedance: 4ohm
Variable Bass Boost: 0-12dB@50Hz
Input: One Pair RCA
Input Voltage: DC12V

SUBWOOFER SERIES



Model:BT-SW1225Z

12"Subwoofer
Cloth edge non-press cone
50 Oz magnet
2.4"BASV.voice coil(4-layers)
250W RMS Amp.power
600W Max power
Frequency response: 30-200Hz
Impedance: 4 ohm
SPL: 95dB/W/M
1-channel amplifier
Variable bass boost 0-12dB@50Hz
LED indicator for power/protection
Speaker input
Protection circuitry for overload/
overheat/short circuit
Variable LOW pass
Input volume control
Crossover control
Phase control
Amplifier wiring kit included
Power: AC110V or AC220V, 50Hz-60Hz

Model:BT-SW1530Z

15"Subwoofer
Cloth edge non-press cone
62 Oz magnet
3"BASV.voice coil(4-layers)
300W RMS Amp.power
800W max power
Frequency response:30-200Hz
Impedance: 4 ohm
SPL: 96dB/W/M
1-channel amplifier
Variable bass boost 0-12dB@50Hz
LED indicator for power/protection-
Speaker input
Protection circuitry for overload/
overheat/short circuit
Variable LOW pass
Input volume control
Crossover control
Phase control
Amplifier wiring kit included
Power: AC110V or AC220V, 50Hz-60Hz

Model:BT-SW1830Z

15"Subwoofer
Cloth edge non-press cone
80 Oz magnet
4"BASV.voice coil(4-layers)
500W RMS Amp.power
1000W Max power
Frequency response: 30-200Hz
Impedance: 4 ohm
SPL: 98dB/W/M
1-channel amplifier
Variable bass boost 0-12dB@50Hz
LED indicator for power/protection
Speaker input
Protection circuitry for overload/
overheat/short circuit
Variable LOW pass
Input volume control
Crossover control
Phase control
Amplifier wiring kit included
Power: AC110V or AC220V, 50Hz-60Hz

SPEAKER ACCESSORIES



Model:BT-15SMA

Norminal Diameter: 15"
Basket: Metal
Voice Coil: 2.0"
Cone Paper: KSV
Magnet:40Oz(140mm)
Impedance: 8ohm
Power Handling: 200W
SPL(dB): 95dB
Frequency(Hz): 38-3.0KHZ
Weight: 3.60KG

Model:BT-15SMB

Norminal Diameter: 15"
Basket: Metal
Voice Coil: 2.4"
Cone Paper: KSV
Magnet:50Oz(156mm)
Impedance: 8ohm
Power Handling: 250W
SPL(dB): 96dB
Frequency(Hz): 38-3.0KHZ
Weight: 4.80KG

Model:BT-15SMC

Norminal Diameter: 15"
Basket: Metal
Voice Coil: 3.0"
Cone Paper: KSV
Magnet:60Oz(170mm)
Impedance: 8ohm
Power Handling: 300W
SPL(dB): 97dB
Frequency(Hz): 36-3.0KHZ
Weight: 5.30KG

Model:BT-15SMD

Norminal Diameter: 15"
Basket: Aluminium
Voice Coil: 3.0"
Cone Paper: KSV
Magnet:100Oz(190mm)
Impedance: 6ohm
Power Handling: 400W
SPL(dB): 98dB
Frequency(Hz): 38-3.0KHZ
Weight: 7.50KG

Model:BT-12SMA

Norminal Diameter: 12"
Basket: Metal
Voice Coil: 1.5"
Cone Paper: KSV
Magnet:30Oz(120mm)
Impedance: 8ohm
Power Handling: 150W
SPL(dB): 92dB
Frequency(Hz): 45-3.0KHZ
Weight: 2.60KG

Model:BT-12SMB

Norminal Diameter: 12"
Basket: Metal
Voice Coil: 2.0"
Cone Paper: KSV
Magnet:40Oz(140mm)
Impedance: 8ohm
Power Handling: 200W
SPL(dB): 93dB
Frequency(Hz): 42-3.0KHZ
Weight: 3.20KG



Model:BT-12SMC

Norminal Diameter: 12"
Basket: Metal
Voice Coil: 2.0"
Cone Paper: KSV
Magnet:50Oz(156mm)
Impedance: 8ohm
Power Handling: 250W
SPL(dB): 94dB
Frequency(Hz): 40-3.0KHZ
Weight: 3.80KG

Model:BT-12SMD

Norminal Diameter: 12"
Basket: Metal
Voice Coil: 2.4"
Cone Paper: KSV
Magnet:50Oz(156mm)
Impedance: 8ohm
Power Handling: 300W
SPL(dB): 95dB
Frequency(Hz): 40-3.0KHZ
Weight: 4.00KG

Model:BT-18SMA

Norminal Diameter: 18"
Basket: Aluminium
Voice Coil: 4.0"
Cone Paper: KSV
Magnet:123Oz(220mm)
Impedance: 6ohm
Power Handling: 900W
SPL(dB): 98dB
Frequency(Hz): 45-3.0KHZ
Weight: 12.00KG

SPEAKER ACCESSORIES



Model: BT-25T


Cone paper: 1"
 Installation hole: $\Phi 80$
 Magnet: 11Oz
 Power: 25W
 Impedance: 8ohm
 SPL(dB): 100 $\pm$ 3dB
 Frequency(Hz): 1.2K-20KHz
 Weight:700g

Model: BT-34T

Cone paper: 1.3"
 Installation hole: $\Phi 95$
 Magnet: 12Oz
 Power: 60W
 Impedance: 8ohm
 SPL(dB): 100 $\pm$ 3dB
 Frequency(Hz): 1.2K-20KHz
 Weight:930g

Model: BT-44T

Cone paper: 1.7"
 Installation hole: $\Phi 120$
 Magnet: 25Oz
 Power: 80W
 Impedance: 8ohm
 SPL(dB): 100 $\pm$ 3dB
 Frequency(Hz): 1.2K-20KHz
 Weight:1360g

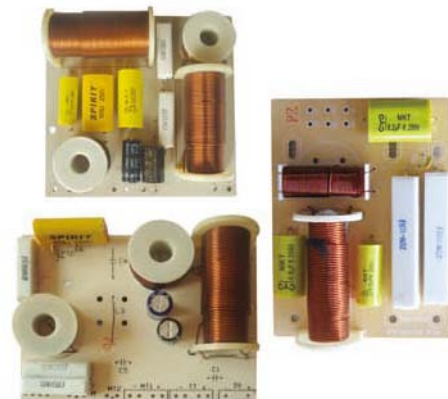

Model: BT-C1

Type:3 way crossover
 Overall Dimension: $\Phi 125 \times 120 \times 35$ mm
 Installation hole: $\Phi 3-4.2$
 Frequency: 500-3500
 Power: 600W
 Impedance: 8 $\pm$ 1.2ohm
 Decay rate: 12dB/oct
 Frequency Response:20-20KHz

Model: BT-C2

Type:3 way crossover
 Overall Dimension: $\Phi 125 \times 120 \times 35$ mm
 Installation hole: $\Phi 3-4.2$
 Frequency: 500-3500
 Power: 600W
 Impedance: 8 $\pm$ 1.2ohm
 Decay rate: 12dB/oct
 Frequency Response:20-20KHz

Model: BT-C3

Type:2 way crossover
 Overall Dimension: $\Phi 90 \times 80 \times 25$
 Installation hole: $\Phi 4-4.2$
 Frequency: 5000
 Power: 200W
 Impedance: 12 $\pm$ 1.2ohm
 Decay rate: 6dB/oct
 Frequency Response:20-20KHz

BareTone[®]

MAXTRONIX CO.,LTD.

Add:NO.5 Hexiang Road,Wujin Economic
Development Zone,Changzhou,Jiangsu,China.

Tel:86-519-86363871

86-519-86363885

86-519-86363887

E-Mail:sales@maxtronix.biz
sales@spiketronix.com
www.cnbaretone.com